


HAUPTSÄCHLICH IN DREHMASCHINEN MIT DEM ZIEL VERWENDET,
 LANGE UND DÜNNE TEILE ZU STABILISIEREN, DIE STÄRKEREN...

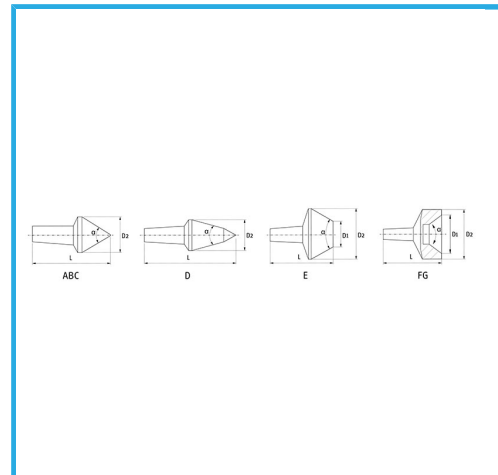

konische Schraubstöcke

A	2
B	L2 39 mm - D2-D3 16 mm - $\hat{I} \pm 60^\circ$ mm
C	L2 35,5 mm - D2-D3 16 mm - $\hat{I} \pm 75^\circ$ mm
D	L2 33 mm - D2-D3 16 mm - $\hat{I} \pm 90^\circ$ mm
E	L2 46 mm - D2-D3 16 mm - $\hat{I} \pm 60^\circ$ mm
F	L2 40 mm - D2-D3 25 mm / 10 mm - $\hat{I} \pm 60^\circ$ mm
G	L2 36 mm - D2-D3 16 mm / 10 mm - $\hat{I} \pm 60^\circ$ mm
	L2 39 mm - D2-D3 20 mm / 16 mm - $\hat{I} \pm 60^\circ$ mm

max. Drehzahl	5000 g/min
max. Kapazität	45 kg
Bruttogewicht	1,32 kg
Verpackungsmaße	305x165x70h mm
EAN-Code	8012667244682



Koffer



Gehärteter



9 Pcs



Stahl



Gehärtet