


UTILIZZATE PRINCIPALMENTE NEI TORNİ CON Lâ€™OBIETTIVO DI
STABILIZZARE I PEZZI LUNGHİ E SOTTILI, PIÙ SOGGETTI ALLA
FLESSIONE O..



€213,00

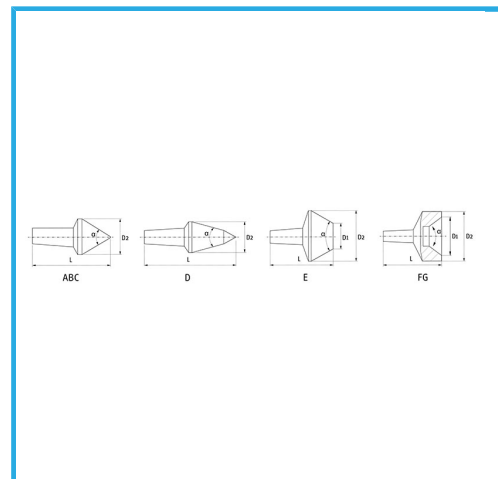

Cono morse

A	3
B	L2 48 mm - D2-D3 20 mm - $\hat{I} \pm 60^\circ$ mm
C	L2 43,5 mm - D2-D3 20 mm - $\hat{I} \pm 75^\circ$ mm
D	L2 40,5 mm - D2-D3 20 mm - $\hat{I} \pm 90^\circ$ mm
E	L2 56 mm - D2-D3 18 mm - $\hat{I} \pm 60^\circ$ mm
F	L2 50 mm - D2-D3 35 mm / 15 mm - $\hat{I} \pm 60^\circ$ mm
G	L2 42 mm - D2-D3 22 mm / 18 mm - $\hat{I} \pm 60^\circ$ mm
G	L2 48 mm - D2-D3 35 mm / 30 mm - $\hat{I} \pm 60^\circ$ mm

Max rpm

5000 g/min

Portata max

150 kg

Peso lordo

2,18 kg

Dimensioni imballo

355x180x75 h mm

Codice EAN

8012667205201



Valigetta



Temprato



9 Pcs



Acciaio



Rettificato