


HAUPTSÄCHLICH IN DREHMASCHINEN MIT DEM ZIEL VERWENDET,
 LANGE UND DÜNNE TEILE ZU STABILISIEREN, DIE STÄRKEREN...

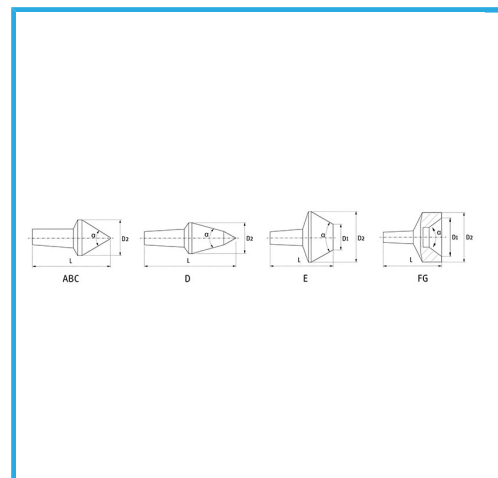

konische Schraubstöcke

A	4
B	L2 61,5 mm - D2-D3 28 mm - $\hat{I} \pm 60^\circ$ mm
C	L2 55,5 mm - D2-D3 28 mm - $\hat{I} \pm 75^\circ$ mm
D	L2 51,5 mm - D2-D3 28 mm - $\hat{I} \pm 90^\circ$ mm
E	L2 69 mm - D2-D3 26 mm - $\hat{I} \pm 60^\circ$ mm
F	L2 61,5 mm - D2-D3 50 mm / 28 mm - $\hat{I} \pm 60^\circ$ mm
G	L2 55 mm - D2-D3 40 mm / 35 mm - $\hat{I} \pm 60^\circ$ mm
	L2 60 mm - D2-D3 55 mm / 48 mm - $\hat{I} \pm 60^\circ$ mm

max. Drehzahl	5000 g/min
max. Kapazität	240 kg
Bruttogewicht	3,88 kg
Verpackungsmaße	380x225x110 h mm
EAN-Code	8012667011178



Koffer



Gehärteter



9 Pcs



Stahl



Gehärtet